

AN IMPROVED NORMALIZATION METHODOLOGY FOR DEVELOPING MEAN HUMAN RESPONSE CURVES

Kevin Moorhouse

National Highway Traffic Safety Administration
United States
Paper Number 13-0192

ABSTRACT

Mean human response curves and associated biomechanical response targets are commonly developed from Post-Mortem Human Subject (PMHS) test data to guide the design of anthropomorphic test devices (ATDs) by providing “target” biomechanical responses to impact. Since differences in anthropometry and physical characteristics within a group of PMHS can result in widely varying response data, the first step in developing target biomechanical responses is typically to normalize the responses to a certain “standard” anthropometry representing the ATD to be designed or evaluated. The normalization procedure should adjust the response data to account for the variation in anthropometry and physical characteristics, and thus should collapse the group of curves closer to a single response so that a mean response can be more accurately established that represents the human response of the “standard” anthropometry selected. Several methods for normalizing PMHS test data can be found in the literature, but there is no consensus as to which is the most effective. In this study, the two most common existing normalization techniques, as well as some newly developed methodologies, were evaluated by applying them to both a side impact PMHS sled test data set, and a lateral and oblique pendulum side impact PMHS data set. The efficacy of the normalization techniques were assessed for each group of common signals by calculating the average percent coefficient of variation (%CV) for time-history curves, and an analogous measure for force-deflection curves (%CV_{ellipse}). Both of these measures provide a quantifiable assessment of the similitude of the group of curves (i.e., the normalization technique resulting in the lowest average %CV value or %CV_{ellipse} value most effectively collapses the curves). The normalization technique found to consistently perform the best is a newly developed extension of impulse momentum-based normalization in which the stiffness ratio was determined from effective stiffness values calculated from the test data, rather than using characteristic lengths. Utilization of an improved normalization methodology in the development of mean human

response curves should prove useful in more accurately characterizing the target human response to aid in the design of more biofidelic dummies.

INTRODUCTION

Biomechanical response corridors developed from human subject test data are commonly used to guide the design of anthropomorphic test devices (ATDs) by providing “target” biomechanical responses to impact. The biomechanical responses typically consist of physical measures such as force, acceleration, or deflection, and could be in the time-domain or another domain (e.g., force-deflection). The ability of an ATD to match these target responses defines its biofidelity.

The target responses are most often developed by subjecting a group of Post-Mortem Human Subjects (PMHS) to an impact or crash scenario, measuring the resulting responses, and then representing each group of responses such that it characterizes the response of the selected population and can be used to evaluate the biofidelity of the corresponding ATD response. One way to accomplish this is to encompass the entire group of response curves for a given measurement using straight-line segment corridors, and then a biofidelic dummy response is expected to lie entirely within that corridor (ISO/TR9790, 1999; Lobdell et al., 1973). Another methodology is to reduce the group of responses into a single mean response curve, which itself represents the ATD design target (Cavanaugh et al., 1986; Maltese et al., 2002; Morgan et al., 1986). In addition to the mean response curve, standard deviation curves can be created around the mean to provide both a visual measure of the variation in the group of PMHS, as well as a quantitative measure of that variation for assessing the biofidelity of an ATD. Generally the standard deviation curves envelop the mean curve more tightly than the straight-line segment corridors, and there is no requirement that a biofidelic ATD response must lie completely within the standard deviation curves. Representing the target response using the mean response and standard deviation curves is more appealing than straight-line segment corridors because it provides a quantifiable framework for assessing the biofidelity of an ATD

while maintaining the shape and characteristics of the actual human response to impact.

Since there are a variety of ATDs, each representing a certain “standard” anthropometry or set of physical characteristics (i.e., 50th percentile male, 5th percentile female, etc.), it is important that the PMHS responses used to develop the design targets represent the same respective population. However, in reality there is often large variation in the physical characteristics within a group of human subjects (e.g., size, shape, inertial properties, etc.) which results in widely varying response data. Normalization is a procedure for mathematically adjusting the response data to account for the variation in physical characteristics, and is often the first step in developing target biomechanical responses. Successful normalization should collapse the group of curves closer to a single response so that a mean response can be more accurately established that represents that of the selected population.

Anthropometric variation between subjects such as differences in height and weight can obviously affect the magnitude of the response data, but differences in factors such as body mass distribution (i.e., fat-to-muscle ratio) can not only affect the magnitude but also affect the phase or timing of the response data, which is especially critical to the creation of a mean response curve. Figure 1 shows an example of two curves (blue and red) which are out of phase but similar in shape and magnitude. The resulting mean curve (black) is bimodal, much lower in magnitude, and has a shape nothing like either of the individual curves. Ideally, normalization would be able to account for the variation between the subjects which caused this out-of-phase response, thus resulting in a more representative mean response curve.

Although several methods for normalizing human subject test data can be found in the literature, the two most commonly implemented procedures are mass-based normalization as described by Eppinger (1984), and impulse momentum-based normalization as described for single mass systems (e.g., sled & drop tests) by Mertz (1984) and for two-mass systems (e.g., pendulum tests) by Viano (1989).

Mass-based normalization (Eppinger et al, 1984)

The mass-based procedure normalizes human subject response data based solely on a mass ratio involving the subject’s total body mass and the total body mass of the “standard” subject to which the responses are to be normalized. The underlying theory was

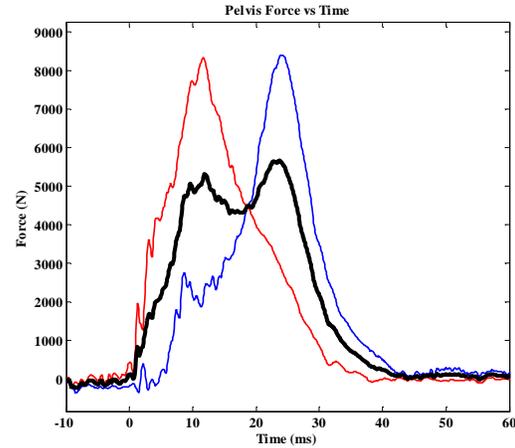


Figure 1. Mean curve resulting from two out-of-phase responses

developed based on a dimensional analysis approach to geometric scaling in which three scaling ratios containing the fundamental dimensions of mass, length, and time must be defined in order to derive scaling ratios for other engineering variables of interest. Two of these ratios were defined to assume constant density and modulus of elasticity among subjects; the third ratio is the total body mass ratio:

$$1 = \frac{\rho_{50th}}{\rho_{sub}} \quad 1 = \frac{E_{50th}}{E_{sub}} \quad \lambda = \frac{M_{50th}}{M_{sub}} \quad (1)$$

where ρ is density, E is the modulus of elasticity, M is total body mass, λ is the total body mass scaling ratio, and the subscripts “50th” and “sub” represent the “standard” subject and test subject, respectively. Note that since the most common “standard” subject is the 50th percentile male it will hereafter be referred to with the subscript “50th”, and M_{50th} can be easily obtained from anthropometric tables.

Normalizing factors for engineering variables of interest (L = length or deflection, F = force, A = acceleration, T = time, and V = velocity) can then be derived from the three ratios in Equation (1) in conjunction with fundamental laws of physics, as shown in Equations (2) – (6):

$$\rho = \frac{M}{L^3} \Rightarrow L_{50th} = \lambda^{1/3} L_{sub} \quad (2)$$

$$E = \frac{F}{L^2} \Rightarrow F_{50th} = \lambda^{2/3} F_{sub} \quad (3)$$

$$F = MA \Rightarrow A_{50th} = \lambda^{-1/3} A_{sub} \quad (4)$$

$$A = \frac{L}{T^2} \Rightarrow T_{50th} = \lambda^{1/3} T_{sub} \quad (5)$$

$$V = \frac{L}{T} \Rightarrow V_{50th} = V_{sub} \quad (6)$$

The strengths of mass-based normalization are that it is easy to implement, the procedure is independent of test condition (i.e., the same procedure is used for sled tests, drop tests, and pendulum tests), and the adjustment made to the response data is directly linked to the easy-to-obtain anthropometry measure of total body mass. The fact that the response data is adjusted based solely on total body mass may make it easy to implement, but it could also be considered a weakness because measures of anthropometry alone are often poor predictors of response data. The physical variation in the subjects includes not just anthropometry but also variables such as age, gender, nutrition, pathology, etc. which cannot be accounted for and predicted by anthropometry. In addition, adjusting the signals based solely on total body mass often does not work well for component-level tests such as pendulum impacts.

A limitation of this type of normalization is that the underlying theory for geometric scaling forces an assumption of full-body geometric similitude (i.e., the ratio of lengths at one body region applies to all other body regions as well) even though in reality body regions are often proportioned differently from subject-to-subject. Also, while the two fundamental material constituency assumptions of constant density and constant modulus among subjects are likely reasonable approximations, there will of course be some variation. The biggest limitation to this method is that the response data of a tall and thin osteoporotic subject with the same total body mass as an overweight and short healthy-boned subject would scale identically, implying that they would be expected to exhibit a similar response to an identical impact.

Impulse momentum-based normalization (Mertz, 1984; Viano, 1989)

This procedure normalizes human subject response data based on both a mass ratio and a stiffness ratio,

and then models the impacts as a simple spring-mass system:

$$\lambda_m = \frac{m_{50th}}{m_{sub}} \quad \lambda_k = \frac{k_{50th}}{k_{sub}} \quad (7)$$

For the mass ratio, instead of a simple ratio of total body mass, an effective mass of the impacted body region is estimated from the response data using an impulse momentum analysis as shown in Equation (8):

$$\int_0^T F dt = m_{eff} v_0 \Rightarrow m_{eff} = \frac{\int_0^T F dt}{v_0} \quad (8)$$

where m_{eff} is the effective mass, F is the force during impact, v_0 is the change in velocity during the impact, and T is the duration of impact. By incorporating the response data in the normalization procedure, some of the other causes for variation besides anthropometry (discussed earlier) can be somewhat accounted for. Unlike the total body mass ratio where the mass of the 50th percentile male is easily obtained from anthropometric tables, the standard effective mass of the 50th percentile male, m_{50th} , is dependent on the test condition and is thus typically unknown. Therefore the value is estimated by calculating the ratio of each subject's effective mass to their total body mass, averaging the ratio across subjects, and multiplying by the total body mass of the population to which the data is to be normalized (e.g., 76 kg for a 50th percentile male).

For the stiffness ratio, Mertz (1984) showed that by assuming a constant modulus among subjects and geometric similitude within the impacted body region, the stiffness ratio could be approximated using a ratio of characteristic lengths. For example, if the impact involves the thorax then chest depth or chest breadth might be chosen as the characteristic length used to calculate the stiffness ratio. Once a characteristic length is chosen, the corresponding length for a 50th percentile male can be obtained from anthropometric tables.

Normalizing factors for engineering variables of interest (t = time, a = acceleration, v = velocity, x = length or deflection, and F = force) can then be derived from the mass ratio and stiffness ratio in Equation (7) in conjunction with the solution to the differential equations of motion for a simple spring-mass system, as shown in Equations (9) – (13):

$$t = \pi \sqrt{\frac{m}{k}} \Rightarrow t_{50th} = \sqrt{\frac{\lambda_m}{\lambda_k}} t_{sub} \quad (9)$$

$$a = -v_o \sqrt{\frac{k}{m}} \sin\left(\sqrt{\frac{k}{m}} t\right) \\ \Rightarrow a_{50th} = \sqrt{\frac{\lambda_k}{\lambda_m}} a_{sub} \quad (10)$$

$$v = -v_o \cos\left(\sqrt{\frac{k}{m}} t\right) \Rightarrow v_{50th} = v_{sub} \quad (11)$$

$$x = v_o \sqrt{\frac{m}{k}} \sin\left(\sqrt{\frac{k}{m}} t\right) \\ \Rightarrow x_{50th} = \sqrt{\frac{\lambda_m}{\lambda_k}} x_{sub} \quad (12)$$

$$F = -v_o \sqrt{km} \sin\left(\sqrt{\frac{k}{m}} t\right) \\ \Rightarrow F_{50th} = \sqrt{\lambda_m \lambda_k} F_{sub} \quad (13)$$

Note that the normalizing factors shown in Equations (9) - (13) were derived from the equation for a single mass, single spring system so they are only valid for sled tests and drop tests where the impacting mass can be assumed infinite. For pendulum impacts, the equations of motion for a two-mass system are used to derive the normalizing factors shown in Equations (14) – (18), where m_p is the mass of the impactor.

$$t_{50th} = \sqrt{\frac{\lambda_m}{\lambda_k}} \sqrt{\frac{(m_p + m_{sub})}{(m_p + m_{50th})}} t_{sub} \quad (14)$$

$$a_{50th} = \sqrt{\frac{\lambda_k}{\lambda_m}} \sqrt{\frac{(m_p + m_{sub})}{(m_p + m_{50th})}} a_{sub} \quad (15)$$

$$v_{50th} = v_{sub} \quad (16)$$

$$x_{50th} = \sqrt{\frac{\lambda_m}{\lambda_k}} \sqrt{\frac{(m_p + m_{sub})}{(m_p + m_{50th})}} x_{sub} \quad (17)$$

$$F_{50th} = \sqrt{\lambda_m \lambda_k} \sqrt{\frac{(m_p + m_{sub})}{(m_p + m_{50th})}} F_{sub} \quad (18)$$

The primary strength of this normalization method is that it incorporates the response data so that it can potentially account for variation in response arising from subject differences other than just anthropometry. A weakness with this procedure involves using a characteristic length for the stiffness ratio, because the choice of which characteristic length to use is somewhat subjective. Also, using a characteristic length as a surrogate for stiffness requires the assumptions of constant modulus and geometric similitude within the impacted body region. However, if the effective stiffness of the subject could be estimated from the response data, similar to the effective mass, then those assumptions would not be necessary.

To date, there is no quantitative consensus as to which of the normalization techniques discussed above is most effective. Furthermore, some areas of potential improvement for both methods have been identified. Therefore, the goal of this study was to quantify the effectiveness of the two existing normalization procedures as well as some new methodologies developed in this study based on the identified potential improvements.

METHODS

Potential improvements to existing normalization methods

After reviewing the two most common existing normalization methods, some weaknesses and potential areas of improvement were identified, and some new methodologies were developed to address these areas. For the mass-based normalization the most prominent limitation is that body mass distribution is unaccounted for. Therefore, replacing the ratio of total body mass with a ratio involving a measure of “body type” such as the Body Mass Index (BMI) in Equation (19), or the Ponderal Index (PI) in Equation (20), was investigated as a potential improvement.

$$BMI = \frac{Mass}{Height^2} \quad (19)$$

$$PI = 10 \left(\frac{\sqrt[3]{Mass}}{Height} \right) \quad (20)$$

For the impulse momentum-based normalization it would be valuable to know the importance of the choice of characteristic length in the stiffness ratio, so various characteristic lengths and combinations of characteristic lengths (i.e., aspect ratios) were evaluated. Specifically, a characteristic length was measured along each of the three axes of the body coordinate system (e.g., chest depth, chest breadth, and chest height), directly along the line of impact, and around the circumference of the impacted area. Each of these measurements was then used as the characteristic length for the stiffness ratio as well as multiple combinations of each of these measurements.

Also, replacing the characteristic length estimate of stiffness with an actual estimate of the effective stiffness calculated from the response data was investigated as a potential improvement. As long as deflection data for the relevant body region is measured, a methodology somewhat analogous to Equation (8) for calculating an effective mass can be implemented to estimate an effective stiffness, as illustrated in Equation (21):

$$\int F dx = \frac{1}{2} k_{eff} x_{max}^2$$

$$\Rightarrow k_{eff} = \frac{2 \int F dx}{x_{max}^2} \quad (21)$$

where k_{eff} is the effective stiffness, F is the force during impact, and x_{max} is the maximum displacement during the impact. As with the effective mass in the impulse momentum-based normalization, the standard effective stiffness of the 50th percentile male, k_{50th} , is dependent on the test condition and is thus unknown. Therefore the value is estimated by calculating the ratio of each subject's effective stiffness to a characteristic length of the subject (e.g., chest breadth for a thoracic side impact), averaging the ratio across subjects, and multiplying by the characteristic length of the population to which the data is to be normalized.

Data sets for normalization evaluation

Two data sets were chosen for the normalization evaluation – a full-body side impact sled test data set (Maltese et al., 2002) and a component-level thorax pendulum impact data set (Shaw et al., 2006).

Full-body side impact sled test data set (Maltese et al., 2002)

For the sled test data set, normalization procedures were evaluated for all test conditions that contained three or more subjects after a subject exclusion evaluation. Subjects were excluded if they failed a conservation of momentum check (Nusholtz et al., 2007) or if there was significant “leaning” which was defined as the pelvis contacting the flat wall more than 10 ms after the thorax (Irwin et al., 2005). Four test conditions with three or more subjects remained for the evaluation after subject exclusion: Rigid High-Speed Flat Wall (RHF), Padded High-Speed Flat Wall (PHF), Rigid Low-Speed Flat Wall (RLF), and Padded Low-Speed Flat Wall (PLF).

The thoracic deflection for each subject was obtained by averaging the half-deflections measured by the upper and middle thoracic chestband signals (if they both existed), or using the half-deflection from either the upper or the middle thoracic chestband signals (if only one existed). Although Maltese (2002) calculated both full- and half-deflections, half-deflections were utilized in this study as they were deemed more relevant for comparison with an ATD.

The normalization techniques were applied to several signal groups from the four sled test conditions including multiple time-histories (Thorax Loadwall, Abdomen Loadwall, Pelvis Loadwall, Upper Spine Y accel, Lower Spine Y accel, Pelvis Y accel, Thoracic Deflection) as well as the force-deflection responses for the thorax (F-D Thorax).

Lateral and oblique pendulum side impact data set (Shaw et al., 2006)

For the pendulum impact data set, normalization procedures were evaluated for both the lateral impact test condition and the oblique impact test condition, and no subjects were excluded based on the criteria discussed above.

Shaw (2006) only reported results for full-deflection of the thorax, but half-deflections were also calculated in the study and the corresponding electronic data was obtained via personal communication and used for this evaluation to be consistent with the full-body sled test data set.

The signal groups analyzed for both the lateral and oblique test conditions included the force-time histories (Force), deflection-time histories (Deflection), and force-deflection responses (F-D).

Assessment of efficacy of normalization techniques

Each normalization technique was evaluated based on its ability to collapse each group of curves to map onto a single response, because ideal normalization should not only adjust the response data to the appropriate target population but also remove subject-to-subject variation due to differences in anthropometry and physical characteristics (e.g., age, gender, nutrition, pathology, etc.). Therefore a quantifiable assessment of the similitude of a group of curves was required.

Time histories

Since the percent coefficient of variation (%CV) is often used to assess the repeatability of a set of similar ATD responses, this quantity was deemed appropriate to assess the efficacy of the normalization techniques for the time-histories:

$$\%CV = \frac{\sigma}{\mu} \times 100 \quad (22)$$

where

σ is the standard deviation of the responses

μ is the mean of the responses

Although this measure is typically calculated for single value peak responses, in this study it was important to evaluate the similitude of the curves across time as well. Therefore the %CV was calculated at each point in time and then averaged to produce an average %CV across time. Also since the %CV metric does not perform well at low magnitudes of the response (i.e., when the mean value approaches zero), the %CV was only calculated for the time period which included the upper 80% of the mean response (i.e., for values of the mean response that are greater than 20% of the peak magnitude of the mean curve). This average %CV value provides a relative measure of how similar the curves are, where a lower average %CV indicates better grouping of the curves.

Force-deflection histories

To evaluate the similitude of a group of force-deflection curves, an analogous %CV value for force-deflection space was generated. First, an ellipse was formed about each point of the mean force-deflection response with semi-major and semi-minor axes of length equal to one standard deviation each in force and deflection (Shaw, 2006). The area contained within each of these one standard deviation ellipses

was then calculated (analogous to a standard deviation), and divided by the product of the force and deflection value at each point (analogous to a mean value), thus producing a measure for force-deflection responses (%CV_{ellipse}) which is analogous to the %CV for time histories. The %CV_{ellipse} value at each point was averaged across the time period which included the intersection of the upper 80% of the mean force magnitude and the upper 80% of the mean deflection magnitude. As with %CV, lower values of %CV_{ellipse} represent better grouping of the force-deflection curves, and hence more effective normalization.

RESULTS

Although over thirty different variations of normalization techniques were evaluated, the majority of these variations involved different choices of characteristic length used to calculate the stiffness ratio in the impulse momentum-based procedure (see Methods section). However, no discernible difference in the effectiveness of the impulse-momentum normalization procedure could be identified based on the choice of characteristic length, so the results for each individual choice of characteristic length will not be shown. Also for the mass-based normalization, utilizing a ratio of BMI and/or PI instead of the total body mass ratio did not yield a noticeable difference in normalization effectiveness, so these methodologies will also not be presented.

The results from three normalization procedures will be presented in detail in this manuscript along with the non-normalized data for reference (referred to as “Non-normalized”). The first methodology, referred to as “Mass-based”, is the existing mass-based normalization procedure using a ratio of total body mass. The second methodology, referred to as “Eff Mass & Char Length”, is the standard impulse momentum-based procedure using a ratio of effective mass for the mass ratio and a ratio of characteristic lengths for the stiffness ratio. The characteristic lengths were chosen in this evaluation to be consistent with previous studies where the respective data sets were normalized using the impulse momentum-based method. Therefore, chest depth was used for the sled test data (Irwin, 2005) and chest breadth for the pendulum impact data (Shaw, 2006). The third methodology, referred to as “Eff Mass & Eff Stiff”, utilizes a ratio of effective mass for the mass ratio and a ratio of effective stiffness calculated from the response data as in Equation (21) for the stiffness ratio.

The results from the normalization evaluation are given in Table 1 for the full-body side impact sled test data set and in Table 2 for the component-level thorax pendulum impact data set. Since the average %CV and %CV_{ellipse} were both utilized as relative measures of the effectiveness of a given normalization procedure, the percent improvement over the “Non-normalized” data are reported in Tables 1 and 2 for each of the three normalization techniques, rather than the actual numeric values of the measures. The normalization method resulting in the largest percent improvement for each signal group is highlighted in green.

For the full-body sled tests, Table 1 shows that for the eight signal groups that were analyzed in each of the four test conditions (RHF, PHF, RLF, and PLF), the “Eff Mass & Eff Stiff” normalization approach performed the best (i.e., resulted in the largest amount of improvement in curve grouping) for six of the eight RHF and RLF signal groups, seven of the eight PHF signal groups, and five of the eight PLF signal groups. For the component-level pendulum impacts, Table 2 shows that for the three signal groups that were analyzed in each of the two test conditions (Lateral and Oblique), the “Eff Mass & Eff Stiff” normalization approach performed the best in five of the six signal groups. In full, the “Eff Mass & Eff Stiff” normalization approach performed the best in 29 of 38 (~76%) of the signal groups analyzed, as compared to 7 of 38 (~18%) for the “Mass-based” approach and 2 of 38 (~5%) for the “Eff Mass & Char Length” approach.

DISCUSSION

Normalization of time histories

To illustrate an example of normalization on time-histories, the thorax loadwall time-histories for the RHF condition are shown for the “Non-normalized” condition in Figure 2, and the “Mass-based”, “Eff Mass & Char Length”, and “Eff Mass & Eff Stiff” normalization conditions in Figure 3-5, respectively.

Visual inspection of Figures 2 and 3 reveals that “Mass-based” normalization results in a small level of improvement in curve group similitude, and in fact the average %CV improves from 64.7 to 45.1 for a percent improvement of 30.3%. Inspection of Figures 2 and 4 shows that the “Eff Mass & Char Length” normalization results in an even more significant improvement in the curve grouping, with a corresponding 42.8% improvement in the %CV value. Finally, inspection of Figures 2 and 5 illustrates that the “Eff Mass & Eff Stiffness” normalization is very effective at bringing the curves

together, resulting in a 60.9% improvement in the %CV value. The trend revealed above indicates that incorporating the response data into the normalization process results in better grouping of curves and thus more effective normalization.

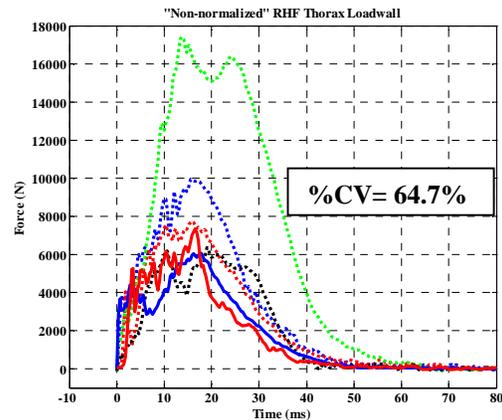


Figure 2. “Non-normalized” RHF thorax loadwall time-histories (%CV = 64.7)

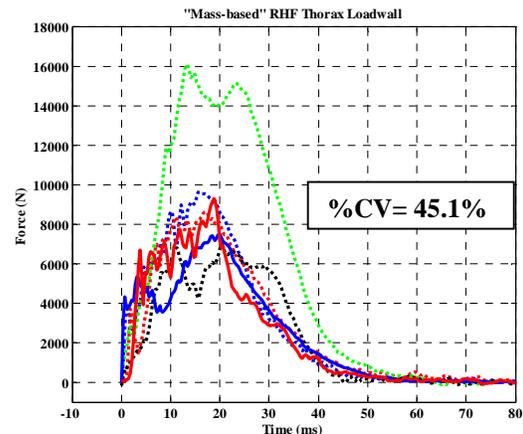


Figure 3. “Mass-based” RHF thorax loadwall time-histories (%CV = 45.1)

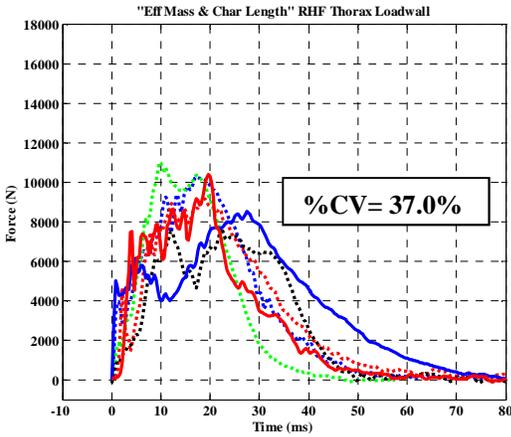


Figure 4. “Eff Mass & Char Length” RHF thorax loadwall time-histories (%CV = 37.0)

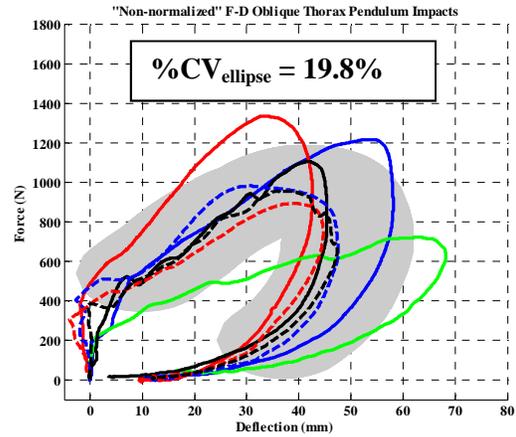


Figure 6. “Non-normalized” Oblique thorax force-deflection histories (%CV_{ellipse} = 19.8%)

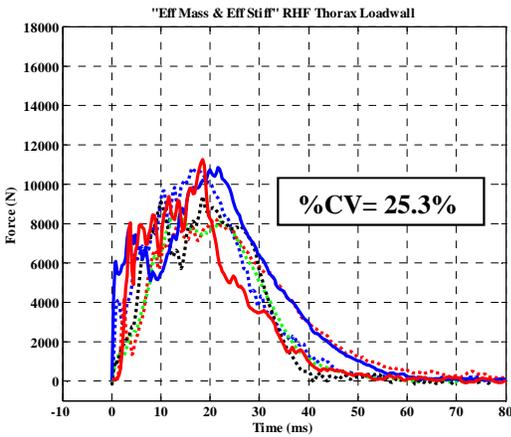


Figure 5. “Eff Mass & Eff Stiff” RHF thorax loadwall time-histories (%CV = 25.3)

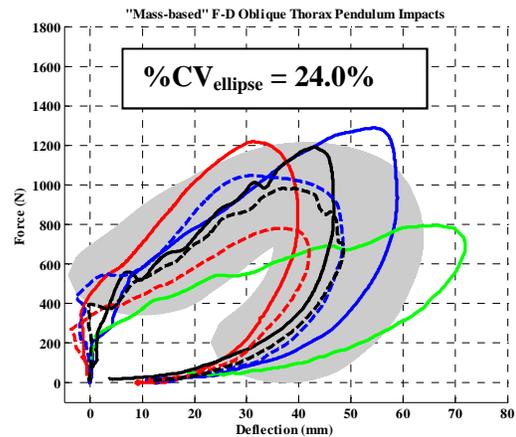


Figure 7. “Mass-based” Oblique thorax force-deflection histories (%CV_{ellipse} = 24.0%)

Normalization of force-deflection histories

To illustrate an example of normalization on force-deflection histories, the force-deflection curves for the oblique thorax pendulum impacts are shown for the “Non-normalized” condition in Figure 6 and the “Mass-based”, “Eff Mass & Char Length”, and “Eff Mass & Eff Stiff” normalization conditions in Figures 7-9, respectively. The grey shaded regions represent the one standard deviation ellipses defined in the Methods section and in Shaw (2006). Note that low values of the %CV_{ellipse} value represent better grouping of the curves and typically correspond to noticeably smaller regions of grey shading.

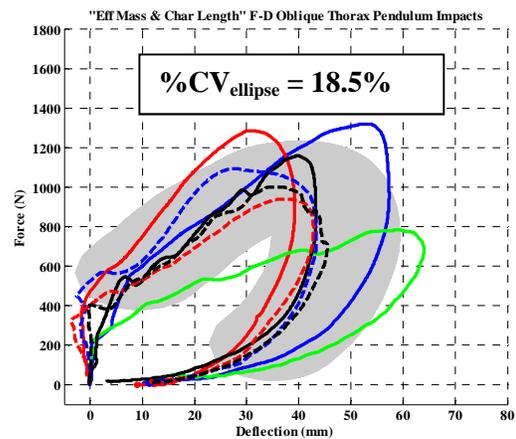


Figure 8. “Eff Mass & Char Length” Oblique thorax force-deflection histories (%CV_{ellipse} = 18.5%)

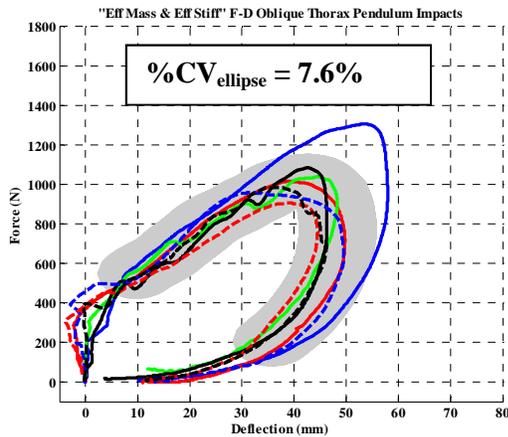


Figure 9. “Eff Mass & Eff Stiff” Oblique thorax force-deflection histories ($\%CV_{\text{ellipse}} = 7.6\%$)

Close visual inspection of Figures 6 and 7 reveals that the grey shaded error region actually gets a little bigger with “Mass-based” normalization, and in fact the average $\%CV_{\text{ellipse}}$ increases from 19.8 to 24.0 resulting in a negative percent improvement of -21.2%. As mentioned earlier, normalization based solely on total body mass often does not perform well in component-level tests like pendulum impacts. Inspection of Figures 6 and 8 shows that the “Eff Mass & Char Length” normalization results in a modest reduction in the grey shaded error region, with a corresponding 6.6% improvement in the $\%CV_{\text{ellipse}}$ value. Finally, inspection of Figures 6 and 9 reveals that the “Eff Mass & Eff Stiffness” normalization causes a rather dramatic alignment of the curves and large improvement in the $\%CV_{\text{ellipse}}$ value of 61.6%.

Additional Discussion

Several additional observations can be made from examination of Tables 1 and 2. For the component-level pendulum impacts, the “Mass-based” normalization approach actually caused the grouping of the curves to get worse than the “Non-normalized” data in all six signal groups, as evidenced by the negative percent improvements. This again supports the indication that total body mass normalization does not perform well in component-level tests.

For the upper spine, lower spine, and pelvis acceleration signals in the sled test data set, there were many instances where one or all of the normalization techniques did not improve the curve grouping relative to the non-normalized data. Furthermore, if the analysis of the normalization results is limited to only these 12 acceleration signal groups, it is much less clear which normalization

methodology performed the best. It is likely that the complexity of these signals, and the additional potential sources for variation associated with the installation of the instrumentation, greatly reduce the effectiveness of normalization for these “internal” signals. However, if the analysis of the results is limited to the other 26 signal groups (i.e., force-time, deflection-time, and force-deflection), normalization is much more effective in improving the grouping of the curves, and the “Eff Mass & Eff Stiffness” approach clearly performs the best. Specifically, it yields the greatest improvement in 21 of 26 (~81%) of these signal groups, as compared to 4 of 26 (~15%) for the “Mass-based” approach and 1 of 26 (~4%) for the “Eff Mass & Char Length” approach.

Limitations

Although the results from this study demonstrate that the normalization of impact response data using the “Eff Mass & Eff Stiff” approach is the most effective way of those examined to improve the similitude of a group of responses for the creation of a mean human response curve, some limitations in the methodology should be pointed out. First, the values for effective stiffness can only be obtained if deflection data is measured directly (e.g., chestband) or can be indirectly estimated (e.g., double integration of accelerometers). Also, the numerator of the stiffness ratio in Equation (7) for “Eff Mass & Eff Stiff” normalization is dependent on the test condition and cannot be obtained from anthropometric tables. Recall that this is also true for the numerator of the effective mass ratio. However, the effective mass and effective stiffness can still be estimated and related directly back to the 50th percentile male (or selected population), using standard anthropometric values as discussed previously.

SUMMARY

Several normalization methodologies were quantitatively evaluated by applying them to time-history data and force-deflection data from both a full-body sled test data set and a component-level pendulum impact data set. The normalization technique (of those examined) found to consistently perform the best is a newly developed extension of impulse-momentum-based normalization in which the stiffness ratio was determined from effective stiffness values calculated from the test data, rather than using characteristic lengths. Utilization of this normalization methodology in the development of mean human response curves may prove useful in more accurately characterizing the target human response to aid in the design of more biofidelic dummies.

Table 1. Normalization results for the full-body side impact sled test data set

	Signal	Mass-Based (% improvement)	Eff Mass & Char Length (% improvement)	Eff Mass & Eff Stiff (% improvement)
RHF	Thorax Loadwall	30.3 %	42.8 %	60.9 %
	Abdomen Loadwall	13.1 %	25.9 %	28.1 %
	Pelvis Loadwall	12.7 %	5.8 %	41.2 %
	Upper Spine Y accel	13.8 %	5.1 %	18.9 %
	Lower Spine Y accel	11.1 %	-23.2 %	10.2 %
	Pelvis Y accel	-2.1 %	-6.4 %	14.0 %
	Thoracic Deflection	13.2 %	-60.6 %	-21.2 %
	F-D Thorax	40.6 %	9.5 %	70.7 %
PHF	Thorax Loadwall	40.3%	42.2 %	57.0 %
	Abdomen Loadwall	3.6%	35.1 %	54.8 %
	Pelvis Loadwall	55.0%	48.3 %	67.7 %
	Upper Spine Y accel	5.4%	8.1 %	7.6 %
	Lower Spine Y accel	9.4%	13.9 %	17.1 %
	Pelvis Y accel	7.6%	8.8 %	9.4 %
	Thoracic Deflection	36.3%	22.4 %	40.3 %
	F-D Thorax	60.3 %	56.2 %	70.1 %
RLF	Thorax Loadwall	9.5 %	19.8 %	23.4 %
	Abdomen Loadwall	3.0 %	30.3 %	36.0 %
	Pelvis Loadwall	2.1 %	10.1 %	27.6 %
	Upper Spine Y accel	-8.7 %	-54.7 %	-25.4 %
	Lower Spine Y accel	-0.7 %	-2.8 %	0.2 %
	Pelvis Y accel	5.6 %	2.9 %	0.6 %
	Thoracic Deflection	-17.4 %	-51.9 %	-4.4 %
	F-D Thorax	-1.3%	-5.7 %	24.1 %
PLF	Thorax Loadwall	40.4 %	5.6 %	18.2 %
	Abdomen Loadwall	28.1 %	43.8 %	46.7 %
	Pelvis Loadwall	3.7 %	-37.7 %	30.8 %
	Upper Spine Y accel	-8.6 %	-8.6 %	-7.9 %
	Lower Spine Y accel	6.6 %	7.0 %	8.4 %
	Pelvis Y accel	16.3 %	-25.8 %	25.8 %
	Thoracic Deflection	28.7 %	21.4 %	26.9 %
	F-D Thorax	55.1 %	0.9 %	20.3 %

Table 2. Normalization results for the component-level thorax pendulum impact data set

	Signal	Mass-Based (% improvement)	Eff Mass & Char Length (% improvement)	Eff Mass & Eff Stiff (% improvement)
Lateral	Force	-16.5 %	9.0 %	-20.3 %
	Deflection	-2.8 %	14.4 %	25.5 %
	F-D	-25.0 %	21.0 %	25.0 %
Oblique	Force	-7.8 %	5.9 %	34.8 %
	Deflection	-14.0 %	5.4 %	41.0 %
	F-D	-21.2 %	6.6 %	61.6 %

REFERENCES

- CAVANAUGH, J. M., NYQUIST, G. W., T., GOLDBERG, S. J., and KING, A. I. (1986). Lower abdominal tolerance and response. Proc. 30th Stapp Car Crash Conference, pp. 41-63.
- EPPINGER, R. H., MARCUS, J. H., and MORGAN, R. M. (1989). Development of dummy and injury index for NHTSA's thoracic side impact protection research program. SAE 840885. Society of Automotive Engineers, Warrendale, PA.
- IRWIN, A. L., SUTTERFIELD, A., HSU, T. P., MERTZ, H. J., ROUHANA, S. W., and SCHERER, R. (2005). Side impact response corridors for the rigid flat-wall and offset-wall side impact tests of NHTSA using the ISO method of corridor development. Proc. 49th Stapp Car Crash Conference, pp 423-456.
- ISO/TR9790. (1999). Road vehicles-lateral impact response requirements to assess the biofidelity of the dummy. Technical Report No. 9790, International Standards Organization, American National Standards Institute, New York, NY.
- LOBDELL, T.E., KROELL, C. K., SCHNEIDER, D. C., and HERING, W. E. (1973). Impact response of the human thorax. Proc. Symposium on Human Impact Response, Plenum Press, New York, NY, pp. 201-245.
- MALTESE, M. R., EPPINGER, R. H., RHULE, H. H., DONNELLY, B. R., PINTAR, F. A., and YOGANANDAN, N. (2002). Response corridors of human surrogates in lateral impacts. Proc. 46th Stapp Car Crash Conference, SAE 2002-22-0017, pp 321-351.
- MERTZ, H. J., (1984). A procedure for normalizing impact response data. SAE 840884. Society of Automotive Engineers, Warrendale, PA.
- MORGAN, R. M., MARCUS, J. H., T., and EPPINGER, R. H. (1986). Side impact – the biofidelity of NHTSA's proposed ATD and efficacy of TTI. Proc. 30th Stapp Car Crash Conference, pp. 27-40.
- NUSHOLTZ, G. S., HSU, T. P., BYERS, L. C. (2007). A proposed side impact ATD bio-fidelity evaluation scheme using cross-correlation approach. Proc. 20th International Technical Conference on the Enhanced Safety of Vehicles (ESV), Paper Number 07-0399.
- SHAW, J. M., HERRIOT, R. G., MCFADDEN, J. D., DONNELLY, B. R., and J. H BOLTE, IV (2006). Oblique and Lateral Impact Response of the PMHS Thorax. Proc. 50th Stapp Car Crash Conference, pp 147-167.
- VIANO, D. C., (1989). Biomechanical responses and injuries in blunt lateral impact. SAE 892432. Society of Automotive Engineers, Warrendale, PA.